


WIRELESS
ALARM FAMILY
HEAT
ALARM




DANISH
DESIGN



5 YEAR
BATTERY



100%
TESTED

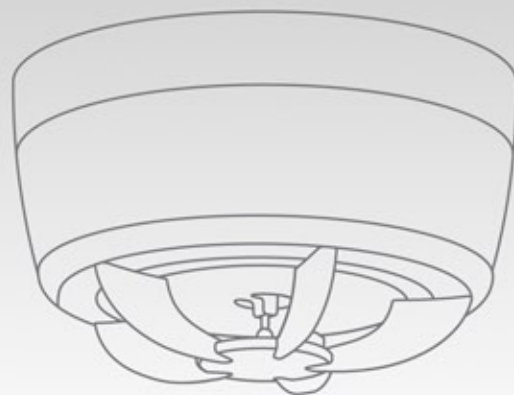

WIRELESS
ALARM FAMILY
HEAT
ALARM



A Product Division of **right action**

Available From:

Fire and Safety Centre

15 Atkinsons Way, Foxhills Industrial Estate
Scunthorpe, North Lincolnshire, DN15 8QJ

Tel: 01724 281044 **Web:** www.fireandsafetycentre.co.uk

Fax: 01724 854213 **Email:** sales@fireandsafetycentre.co.uk

PRODUCT DATA:

HEAT ALARM TYPE:

Thermo sensitive detector with wireless interlink, detecting rapidly increased heat or absolute heat level.

USAGE:

Designed for installation in private homes or garages with risk for smoky, dusty, or humid or environment, as for example kitchen area, living room with wooden stove burner, garage area, washing and drying area etc.

The alarm can be connected with other alarms from the Cavius Wireless alarm family.

OPERATION AC/DC:

DC

BATTERY TYPE:

DURACELL, PANASONIC or HUIDERUI replaceable 3v CR123A lithium battery 1600mAh.

POWER CONSUMPTION:

Battery consumption is 145mAh for 1 year in the non alarm condition.

BATTERY LIFE:

Minimum 5 year life in normal operating condition. (Based on a weekly testing).

INTERLINK FREQUENCY:

868MHZ

RANGE:

Minimum 100m in open field. Range depends on the building materials and will need to be tested in each individual case.

LOW BATTERY INDICATION:

A short acoustic "beep" will sound and LED flash every 48 seconds when the voltage is below 2.85V. In this stage it will continue for minimum 30 days, and can drive the alarm for 4 minutes.

NORMAL OPERATION:

LED flashes every 48 second for normal operation.

SOUND:

Audible indicator min. 85 dB @ 3 meter in anechoic chamber.

SOUND PATTERN:

Fire alarm condition is indicated by a series of three successive tones.

VISIBLE INDICATOR:

A red LED is used to indicate the following conditions:

- alarm condition is indicated by a flash every 0.5 seconds.
- normal operation is indicated by a flash every 48 seconds.

PUSH BUTTON:

The heat alarm includes a push button switch built into the top of the alarm for easy access. This button has the following functions:

- set up - Press the button to start sending out a specific house code to the others alarms.
- hush – during an alarm condition this immediately silences the alarm when pressed. When the button is released, the alarm remains silenced for 10 minutes.
- test – when not in alarm the sounder can be activated to provide a sensor OK test function. While the button is pressed, the audible and visible indicators are activated if the sensor is OK.

WARRANTY:

1 year

PRODUCT WEIGHT (GR):

Base alarm weight (excluding screws, plugs and mounting ring): 50 g



A Product Division of **right action**

Available From:

Fire and Safety Centre

15 Atkinsons Way, Foxhills Industrial Estate
Scunthorpe, North Lincolnshire, DN15 8QJ

Tel: 01724 281044 **Web:** www.fireandsafetycentre.co.uk

Fax: 01724 854213 **Email:** sales@fireandsafetycentre.co.uk

PRODUCT DATA:

OPERATING TEMPERATURE:

+4°C to +38°C (tested from 0 degrees to 55 degrees).

OPERATING HUMIDITY:

Up to 95% RH non-condensing

DETECTION TIMING:

The alarm makes a reading every 8 seconds. At unusual readings (going into alarm stage), the readings are taken every 2 seconds.

INSTALLATION POSITIONS:

Wall & ceiling. Set of 2 x screws and 2 x plugs included.

APPROVALS:

Tested according to EN54-5
EN60065
EN300-220
ROHS
REACH

CE TESTING INSTITUTE:

CNPP

ADDITIONAL TESTING AND APPROVALS:

SGS (RF Approval)

AWARDS:

Red Dot 2016 Design Awards



reddot award 2016
winner

ASSOCIATIONS:

Cavius is member of GIFSID, manufacturers' association of domestic fire safety equipment

STORAGE TEMPERATURE:

-20°C to +60°C

STORAGE HUMIDITY:

Up to 93% RH non-condensing

QUALITY ASSURANCE:

SOUND LEVEL:

100% tested in special designed sound chamber.

SENSITIVITY:

100% tested in special designed test tunnel made by world leader AWT (UK).

POWER CONSUMPTION:

100% tested

BATTERY VOLTAGE AND INTERNAL RESISTANCE:

100% tested

ALARM FUNCTION:

100% tested

INTERCONNECTION:

100% tested

VISUAL APPEARANCE:

100% tested

PACKING CONTENT:

100% tested



A Product Division of **right action**

Available From:


Fire and Safety Centre

15 Atkinsons Way, Foxhills Industrial Estate

Scunthorpe, North Lincolnshire, DN15 8QJ

Tel: 01724 281044 **Web:** www.fireandsafetycentre.co.uk

Fax: 01724 854213 **Email:** sales@fireandsafetycentre.co.uk

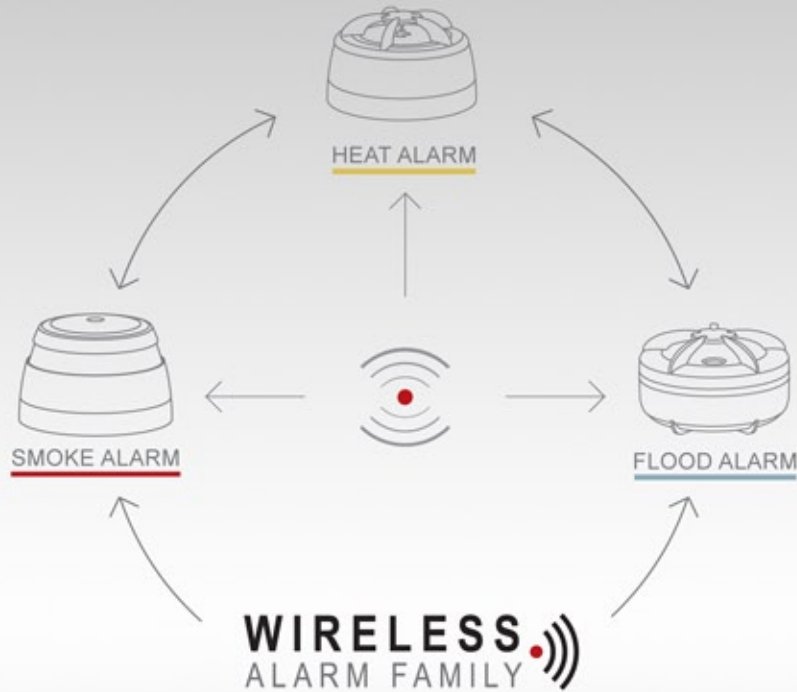

Diameter: 65 mm



A Product Division of **right action**

Available From:

Fire and Safety Centre

15 Atkinsons Way, Foxhills Industrial Estate
Scunthorpe, North Lincolnshire, DN15 8QJ

Tel: 01724 281044 **Web:** www.fireandsafetycentre.co.uk

Fax: 01724 854213 **Email:** sales@fireandsafetycentre.co.uk